

Accessories for Actuated Valves

Type 41070, Type 41071 - Position and Limit Switches



Position and Limit Switches, including fixing device

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 6A gL/gD D-fuse, Switching frequency 3600/h

Standard version

for actuators type 27511, 27512, 27521 and 27522

Part No. 41070.0011.0100100

Protection class IP65 acc. to EN 60529,
Rated operating current/-voltage Ie/Ue: 6A / 400VAC,
3 cable entries M16 x 1.5,
change-over contact with double break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +80°C / 176°F

for actuators type 27514 and 27515

Part No. 41370.0011.0100100

Protection class IP65 acc. to EN 60529,
Rated operating current/-voltage Ie/Ue: 6A / 400VAC,
3 cable entries M16 x 1.5,
change-over contact with double break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +80°C / 176°F



Position and Limit Switches

Limit switch (0/100%) with parallel roller lever and fixing device, quick-break switch,
Max. fuse rating 5A gG/gN-fuse, Switching frequency 1800/h

EEx-protected version

for actuators type 27511, 27512, 27521 and 27522


Part No. 41071.0012.1322000

Protection class IP65 acc. to EN 60529, EEX d IIC T6,
Rated operating current/-voltage Ie/Ue: 5A / 250VAC,
with cable 4 x 0,75 mm² - cable 3 meter long,
change-over contact with single break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +60°C / 140°F

for actuators type 27514 and 27515

Part No. 41371.0012.1322000

Protection class IP65 acc. to EN 60529, EEX d IIC T6,
Rated operating current/-voltage Ie/Ue: 5A / 250VAC,
with cable 4 x 0,75 mm² - cable 3 meter long,
change-over contact with single break (1 break contact/ 1 make contact),
Ambient temperature -20°C / -4°F up to +60°C / 140°F

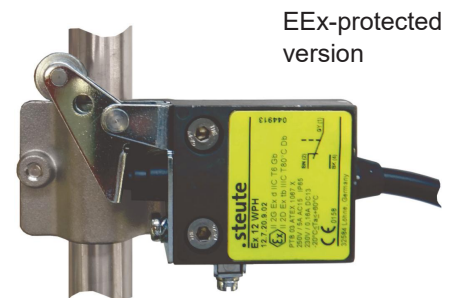

Available options - on request only:

- overrun limit switch to signal intermediate positions
- other cable length